
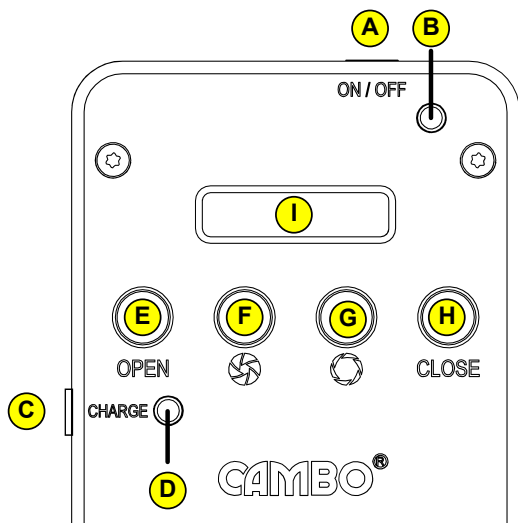


Please read this manual carefully before using the Cambo ACB-CA lens panel!

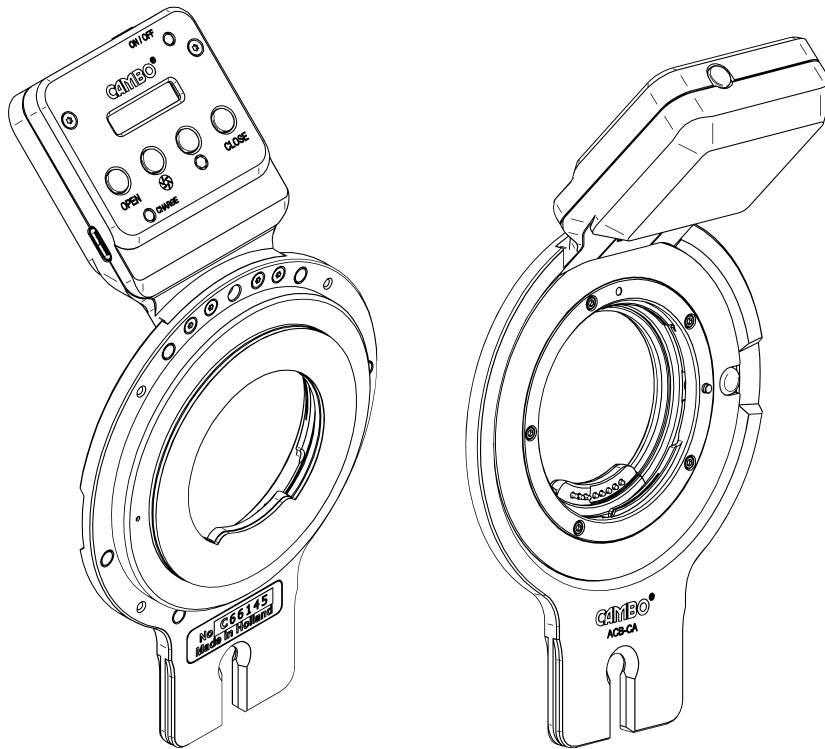

A	On/Off button
B	Active state LED
C	USB-C port
D	Battery indicator LED
E	Max. open aperture
F	Stop down aperture
G	Stop up aperture
H	Toggle to work aperture
I	Display

Figure 1: WRE-CA user interface

User instructions



The ACB-CA is compatible with the Actus camera system.

1. Mount a Canon lens to the lens panel by aligning the red dot and turning the lens counter clockwise until the lens snaps in the lens lock.
2. Mount the lens panel to the Actus camera,
3. Press and hold on/off button (A) for 3 seconds to switch on the ACB-CA, active state LED (B) will turn blue to indicate the ACB-CA is on. Please note: The lens panel goes to standby-modus after 5 minutes, the aperture will not change during stand by
4. When the lens panel is switched on, the last selected aperture is shown, for example; F/32.
5. Press (E) to toggle to the largest aperture opening, for example; F4
6. Press (F) to stop down the aperture
7. Press (G) to stop up the aperture
8. The last selected aperture set by using (F) or (G) is remembered by button (H)
9. Press (E) and (H) to toggle between the largest aperture and the set aperture.

Battery life/charging

Battery capacity is shown by the battery indicator LED (D). If battery capacity drops below 10% the LED will turn red to indicate it is time to charge. Use USB-C port (C) to charge. During charging the indicator will turn from red to blue, blue indicates charging, the LED will turn green when fully charged.

Warnings:

-  When dismantling the lenspanel/lens always support the panel and/or lens.
-  Disclaimer: we are NOT licensed, approved or endorsed by Canon®, customers use at their own risk.